
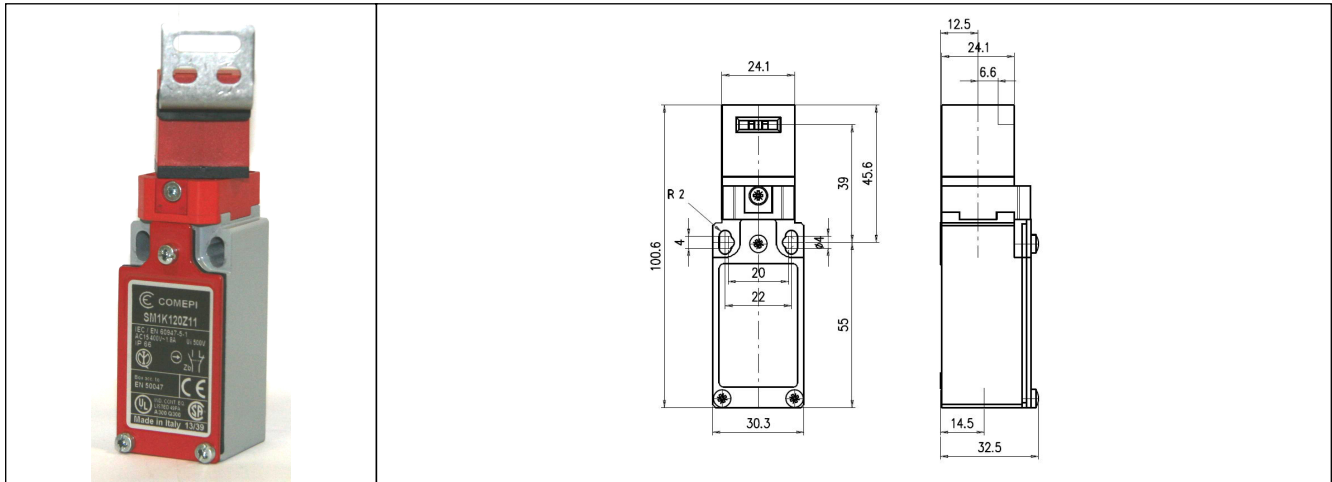



Code	Description
SM5K120X12P	Limit switch
Casing	Safety limit switch - Metal casing IP66 - 30mm width - 1 cable inlet
Electical connection	Cable inlet(s) for M20x1,5 cable gland
Operation head	Fully turnable head
Contacts	X12P: Non overlapping slow action contacts 1NO+2NC



Travel and Operation Diagram

X12P: Non overlapping slow action contacts 1NO+2NC		Positive Opening Operation according to IEC 947-5-1 
--	--	---

General Technical Data

Standards		Metal Casing	
Devices conform with international IEC 947-5-1 and European EN 60 947-5-1 standards		UL - CSA - IMQ	
Certifications - Approvals		Class I	
Air temperature near the device		IP 66**	
- during operation	°C	500 V (degree of pollution 3) (400 V for contacts type X12P, X21P, W03P) A 300, Q 300	
- for storage	°C	6	
Protection against electrical shocks (according to IEC 536)		10	
Degree of protection (according to IEC 529 and EN 60 529)		10	
Rated insulation voltage U_i		10	
- according to IEC 947-1 and EN 60-947-1		1.8	
- according to UL 508 and CSA C22-2 n° 14		2.8	
Rated impulse withstand voltage U_{imp} (according IEC 947-1 and EN 60 947-1)		0.55	
Conventional free air thermal current I_{th} (according to IEC 947-5-1 and EN 60 947-5-1) $\theta < 40$ °C		0.27	
Short-circuit protection		3600	
$U_e < 500$ V a.c. - gG (gl) type fuses		0.5	
Rated operational current		< 25	
I_e / AC-15 (according to IEC 947-5-1)	24 V - 50/60 Hz	A	10
	120 V - 50/60 Hz	A	6
	230 V - 50/60 Hz	A	3.1
	240 V - 50/60 Hz	A	3
	400 V - 50/60 Hz	A	1.8
I_e / DC-13 (according to IEC 947-5-1)	24 V - d.c.	A	2.8
	125 V - d.c.	A	0.55
	250 V - d.c.	A	0.27
Switching frequency		3600	
Cycles/h		0.5	
Load factor		< 25	
Resistance between contacts		< 25	
m Ω		M3.5 (+, -) pozidriv 2 screw with cable clamp (M3 for 3 poles contacts type)	
Connecting terminals		M3.5 (+, -) pozidriv 2 screw with cable clamp	
Terminal for protective conductor		M3.5 (+, -) pozidriv 2 screw with cable clamp	
Connecting capacity		0.75 ... 2.5 (0.34... 1.5 for 3 poles contacts type)	
1 or 2 x mm ²		According to EN 50 013	
Terminal marking		According to EN 50 013	
Mechanical durability		15 } AM•F/T { 11...12; 21; 30...34; 38	
Millions	of	10 } AM•F/T { 41...46; 51...55; 61...75	
operations		>5 } AM•F/T { 14; 35; 36; 39; 91...93; 98	

** AM•F/T52 - 5200 - 55 - 5500 - 73 - 74: PROTECTION DEGREE IP65. - For the complete list of approved products contact our technical department.

